

Kibele

Otomasyon, Danışmanlık Ltd. Şti.

Inönü Cad. STFA Blokları B4 Blok
Daire 68 81090 Kozyatağı / İSTANBUL
Tel. +9 (0.216) 384 31 64
Fax. +9 (0.216) 380 02 71
E-mail:kibele@doruk.net.tr
http://www.kibele.com.tr



TM60/3-TM60/4 console transmitters



Mode to suit your needs

The TM60/3 and TM60/4 console transmitters with joysticks from the TM60 remote control range have been designed with overhead and tower crane applications in mind.

The joysticks, which can be up to 6 notches or stepless, are dual-axis which makes it possible to carry out several functions simultaneously. The joysticks are contact-free which makes them very reliable and guarantees a long life.


Wide ranges of configurations are possible thanks to the flexibility of the design. This means that the equipment can be customized for different applications. A variety of options are available, such as range limitation, feed back from the receiver, or analog outputs which can be adjusted from the

Kibele

Kibele "Hedef mükemmelle ulaşmaksa."

TM60/3-TM60/4 Console transmitters

- 1 Machine identifier.
- 2 LED.
- 3 Multi-step or stepless two-axis joystick.
- 4 Auxiliary commands.
- 5 Stop pushbutton.
- 6 Contact key.
- 7 Start pushbutton.
- 8 Battery.

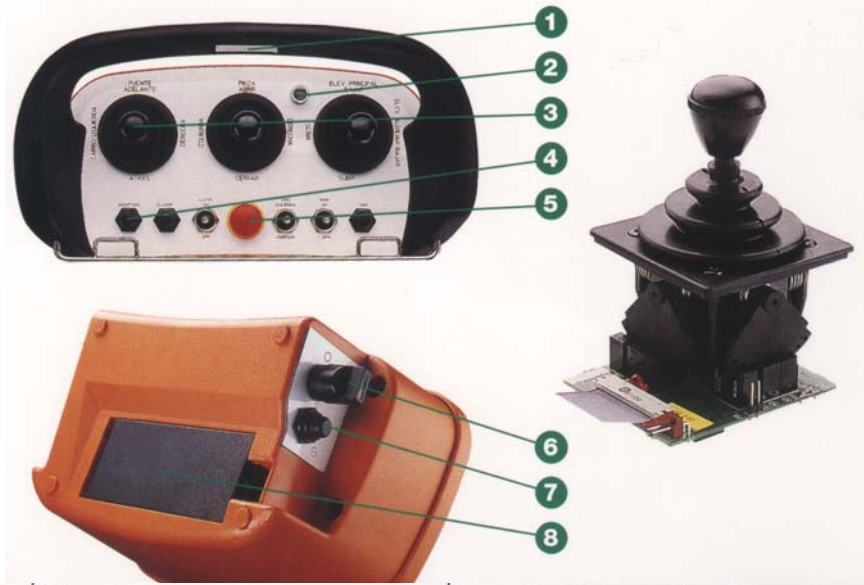

Receiver

Charger and batteries

Belt and strap



Technical Specifications

Transmitter	T60/3	T60/4	Receiver	R60/9	R60/18	R60/26	R60/38
Frequency	405 to 475 MHz		Power supply	48, 115, 230 Vac± 10%; 50/60 Hz			
RF power	10 mW		Dimensions (mm)	340x260x100		340x260x125	
Protection	IP65		Protection	IP55			
Autonomy	approx. 8h		Relays	230 Vac/8 A			
Temperature range	-20 to + 65 °C		Output commands	9	18	26	38
Joysticks	2	3	Other outputs	Start + STOP + Safety			
Auxiliary commands	4	6					
Weight incl. Battery (kg.)	1.8	2.1					
Batteries	BT12		Batteries charger	CB60			
Capacity	1200 mAh, 7.2 V		Power supply	230 Vac ± 10%; 50 Hz			
Charge temperature	5 to 35 °C			Optional 115 Vac, 60 Hz; 24 Vdc			