

İnönü Cad. STFA Blokları B4 Blok Daire 68 81090 Kozyatağı / İSTANBUL Tel. +9 (0.216) 384 31 64 Fax. +9 (0.216) 380 02 71 E-maii:kibele@doruk.net.tr http://www.kibele-automation.com



TM60/5-TM60/6 console transmitters



The perfect solution for concrete pump trucks

The TM60/5 and TM60/6 are specially designed for Use with concrete pump trucks.

With this remote-controlled equipment, the physical link between the controls and the truck is removed, thus eliminating the risk of electrocution arising from the machinery accidentally coming in contact with overhead electricity lines, often a source of very serious injuries.

In addition, the awkwardand time-consuming task of unrolling and laying out of cables before starting a job and collecting and rolling up of the cable on completion is no longer necessary. No additional workers are needed for signaling purposes as the operator is now free to choose a safe vantage point from which to work.



İnönü Cad. STFA Blokları B4 Blok Daire 68 81090 Kozyatağı / İSTANBUL Tel. +9 (0.216) 384 31 64 Fax. +9 (0.216) 380 02 71 E-mail:kibele@doruk.net.tr http://www.kibele-automation.com




TM60/5-TM60/6 Console transmitters

- Machine identifier.
- LED.
- Single step two-axis Joystick.
- Auxiliary commands.
- Stop pushbutton.
- Contact key.
- Start pushbutton.
- Batery.





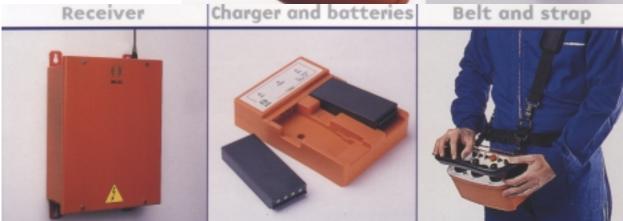

Technical Specifications

Transmitter	T60/5	T60/6	Receiver	R60/18	R60/26	
Frequency RF power Protection Autonomy Temperature range Joysticks Auxillary commands Weight incl. Battery (kg.)	405 to 475 MHz 10 mW IP65 approx. 12h -20 to + 65 °C 3 4 4 6 1.8 2.1		Power supply Dimensions (mm) Protection Relays Output commands Other outputs	340x260x100 IP! 8 18	24 Vdc; optional 12 Vdc 340x260x100 340x260x125 IP55 8 A 18 26 Start + STOP + Safety	
Batteries	BT12		Batteries charger	CB50		
Capacity Charge temperature	1200 mAh, 7.2 V 5 to 35 °C		Power supply	24 Vdc; optional 12 Vdc		